

## Aura-X

### Enterprise Room Booking Panel

Delivering a professional workplace image plus significant improvements in room and resource efficiency



#### Cable Management

Designated cable routes for clean, organized, and versatile installation




#### PoE+ with Port Cover

Aura-X can be powered with a single Ethernet cable. Ports concealed with a back cover



#### Touchless Control

Optional non touch control using RFID for instant booking, check in/out/extend



#### 360° Status Projection

Elegant, soft illumination halo provide clear status indication



#### Authentication Options

NFC / HID ID, PIN or username & password

# Aura-X Features

## Booking Time Bar

Quickly view free and booked periods for the current day

## Auto Set Up & Cleardown

Bookings can have automatically associated set up and clear down times to ensure workspaces are clean and safe for service users

## Future day booking

Click to view and book sessions in the future

## Halo Projection

Smooth full-peripheral soft illumination enhances modern interior aesthetics & amplifies room occupancy visibility

## Custom Screen Design

Your brand, your graphics, your look and feel

## At-a-glance daily bookings

Current/next sessions, duration, meeting title, organizer + attendees info available

## Kiosk/Maps + Dual Language

Click to view optional kiosk or office floor map + dual language switching



## Customizable Booking Control Buttons

Instant book, check in/out/extend buttons. Info button for room information and equipment fault reporting

## Authentication

Multi frequency RFID reader Available (NFC / HID badges)

## Multiple Mounting Options


- VESA 75 mm x 75 mm posts
- Flush, glass, wall, window frame

## Clean & Secure Installation

- Built in cable management
- Power over Ethernet (PoE+)
- Tamper-proof port covering

## Expansion Port

- Supports Wiegand for access control / RS485 / GPIO

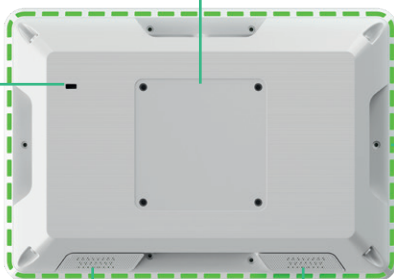


## Kensington Lock

- Anti theft

## 2 W Speaker

- Paired with microphone and / or webcam for 2 way communication

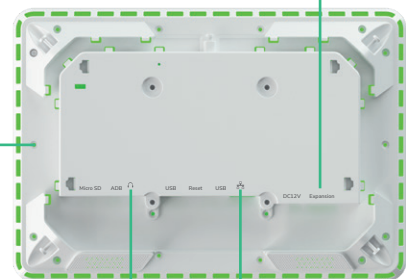

## Audio Jack

- External speaker system for announcements

## PoE+

- Single wire installation

# Mounting Options



Glass



Wall

## Technical Specifications

### Display

- 10.1" LCD panel
- 10 points capacitive multi-touch
- 350 nits maximum brightness
- 1280 x 800 panel resolution
- Viewing angle (H/V): 80 / 80
- LED surround status lights with halo projection

### Internal Player

- Processor: Cortex-A53 Octa-core
- System memory: 2.0 GB
- Flash memory: 16 GB eMMC built-in

### Connectivity

- Wi-Fi: 802.11 a/b/g/n/ac (supports 2.4 GHz and 5 GHz)
- Micro USB for ADB
- Ethernet RJ45: 1000BASE-T, 10/100/1000 Mbps LAN
- USB 2.0 x 2
- Built-in 2 W stereo speaker x 1
- 3.5 mm analog stereo audio out
- Optional 3G / 4G mobile module via USB
- Micro SD card slot, memory expandable to 16 GB / 32 GB / 64 GB (card replaces internal storage)
- Expansion port (supports Wiegand for access control / RS485 / GPIO)
- Optical scanner (8 MP auto focus camera) x 1
- Echo-cancellation microphone x 1

### RFID Specifications

- Aura-X-A: 13.56 Mhz
- Aura-X-H: 13.56 Mhz & 125 Khz

### Room Management Software

- ResourceXpress room screen licence required

### Advanced Features

- ResourceXpress remote device management
- Device health/connectivity monitoring
- Central management of location based settings
- MAC Address validation security
- Touchless interactive operation
- Equipment fault reporting

### Supplied Accessories

- HW QSG
- Built in VESA compatible 75 mm x 75 mm posts
- Back cover screws x 2 pcs
- Flush mount back cover
- Glass mount sticker x 1
- Glass mount cover sheet x 1
- Mounting guide sheet

### Optional Accessories

- Power adapter
- Expansion port connector
- Premium Wall Mount

### Power Requirement

- Input: 100 - 200 V, 50 - 60 Hz
- Output: 12 V, 2 A
- UL / CB certified power supplies
- Interchangeable connector system includes US plug (optional for EU, UK, and AUS plugs)
- IEEE 802.3 at Power-over-Ethernet (PoE+)

### Environmental

- Operating temperature: 0 to 50 °C
- Humidity: 10 to 85 % @ 40 °C non-condensing

### Dimensions for Product & Package

- System Dimension: 261 mm x 181 mm x 29 mm (10.28" x 7.12" x 1.14")
- System Weight: TBC
- Individual package size: 320 mm x 90 mm x 255 mm (12.6" x 0.35" x 10.0")
- Outer carton size: 480 mm x 280 mm x 350 mm (18.9" x 11.0" x 13.8")
- Units per outer carton: 5 pcs

### Certifications

- CE / FCC

### Warranty

- 1-year limited parts & labor (optional three years advance replacement available with ResourceXpress Warranty Plus)



**USA**  
ResourceXpress Inc, 467 Forrest Ave,  
Unit 119, Cocoa, FL 32922

Tel: +1-201 256 1601  
Email: [ussales@qedas.com](mailto:ussales@qedas.com)

**UK**  
QED ResourceXpress, 22 Bridgwater Court,  
Weston-super-Mare, BS24 9AY

Tel: +44 (0)1934 836960  
Email: [sales@qedas.com](mailto:sales@qedas.com)